


Carbon Fiber Fabrics

Carbon fiber fabrics have excellent drape properties which make them ideal for 3D shape applications. Due to the outstanding design possibilities they offer, carbon fabrics are also in high demand for applications that require visual appeal. As well as their design potential, carbon fabric materials offer excellent layup efficiency. You can layup a single ply in two directions.

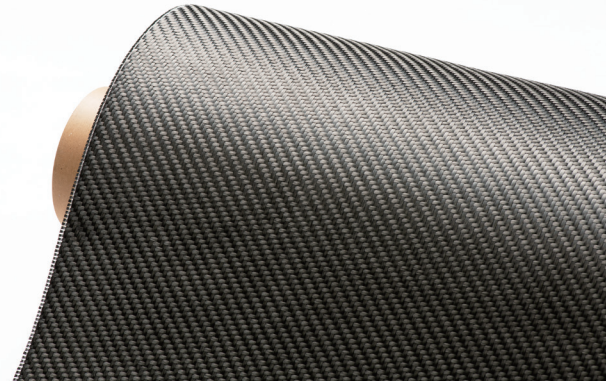

PYROFIL™ Regular Woven Fabric

Product name	Weave structure	Tow		Density (pcs/inch)		Weight (g/m ²)	Thickness (mm)	Std. width (mm)	Std. length (m)
		Warp	Weft	Warp	Weft				
TR3110 M	Plain	TR 30S 3L	TR 30S 3L	12.5	12.5	200	0.23	1,000	100
TR3523 M	2/2 Twill	TR 30S 3L	TR 30S 3L	12.5	12.5	200	0.21	1,000	100
TR6110HM	Plain	TR 50S 6L	TR 50S 6L	9.0	9.0	288	0.32	1,000	100
TR6120HM	Plain	TR 50S 6L	TR 50S 6L	11.0	11.0	350	0.39	1,000	100
TRK101 M	Plain	TR 50S12L	TR 50S12L	6.3	6.3	400	0.46	1,000	50
TRK510 M	2/2 Twill	TR 50S12L	TR 50S12L	10.0	10.0	646	0.57	1,000	50

PYROFIL™ Hybrid Woven Fabric

Product name	Weave structure	Tow		Density (pcs/inch)		Weight (g/m ²)	Thickness (mm)	Std. width (mm)	Std. length (m)
		Warp	Weft	Warp	Weft				
TR3160TMS	Plain	TR 30S 3L	TR 30S 3L	6.0	6.0	180	0.24	1,000	100
		Aramid Fiber	Aramid Fiber	6.0	6.0				

The data and information provided in this document have been obtained from carefully controlled materials and procedures in Mitsubishi Chemical Corporation. Any values provided are considered representative but do not guarantee equivalency for your own testing of our products for your own purpose. Mitsubishi Chemical Corporation makes no warranty or representation, including but not limited to, implied warranties of our product and relevant information for a specific performance, use or purpose. Mitsubishi Chemical Corporation declines any liability with all data and all application made by you and any third party.

The content of this data sheet may change without prior notice.

The transcription of any data or information contained in this data sheet is strictly prohibited without prior written consent.



Carbon Fiber Fabrics

PYROFIL™ Unidirectional Fabric

Product name	Weave structure	Tow		Density (pcs/inch)		Weight (g/m ²)	Thickness (mm)	Std. width (mm)	Std. length (m)	
		Warp	Weft	Warp	Weft					
TRK979PQRW	Plain	TR 50D 12L	Glass fiber & Nylon (polyamide) fiber		6.6	8.0	212	0.25	500	50
TRK976PQRW	Plain	TR 50D 12L	Glass fiber & Nylon (polyamide) fiber		9.9	8.0	317	0.32	500	50

DIALEAD™ Unidirectional Fabric

Product name	Weave structure	Tow		Density (pcs/inch)		Weight (g/m ²)	Thickness (mm)	Std. width (mm)	Std. length (m)	
		Warp	Weft	Warp	Weft					
F637400	Plain	K63712	Glass Fiber		5.0	12.0	400	0.20	330	50

The figures in this table are typical and do not imply any guarantee. The weights of standard and hybrid fabrics include sizing agent. On the other hand, the weight of unidirectional fabrics excludes the weft and sizing agent.

The data and information provided in this document have been obtained from carefully controlled materials and procedures in Mitsubishi Chemical Corporation. Any values provided are considered representative but do not guarantee equivalency for your own testing of our products for your own purpose. Mitsubishi Chemical Corporation makes no warranty or representation, including but not limited to, implied warranties of our product and relevant information for a specific performance, use or purpose. Mitsubishi Chemical Corporation declines any liability with all data and all application made by you and any third party.

The content of this data sheet may change without prior notice.

The transcription of any data or information contained in this data sheet is strictly prohibited without prior written consent.

<https://www.m-chemical.co.jp/carbon-fiber/en/product/fabric/>

